


ALKALINE-MANGANESE DIOXIDE BATTERY

Din forhandler

GACELL[®]
 The right battery
 GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961



Size: 9V (6LR61) PX1604

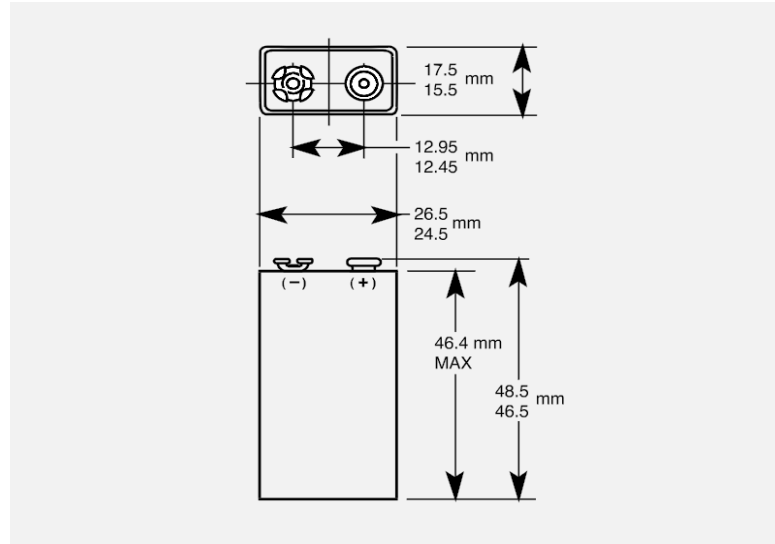

Dimensions shown are IEC standards

KEY FEATURES

- Reliable Performance
- Excellent resistance to corrosion
- Designed to meet all major quality, safety and environmental standards:
 - Safety: IEC 60086-5
 - ANSI C 18.1M, Part-2
 - EU Battery Directive
 - Quality: ISO 14001 and 9001, Duracell World Class Continuous Improvement Program

TYPICAL APPLICATIONS

- Door Locks
- Air Fresheners
- Medical Devices
- Radios

ELECTRICAL CHARACTERISTICS

- Nominal capacity (2 mA Cont., 5V cut-off) 726 mAh
- Typical Voltage (at + 20 °C) 9 V
- AC Impedance @ 1kHz 1,692 mΩ

PHYSICAL CHARACTERISTICS


- Typical weight 48.5 g (1.6 oz)
- Typical volume 22.8 cm³ (1.4 in³)
- Terminals Miniature snap

OPERATING & STORAGE CONDITIONS


- Operating temperature range -20°C to 54°C
(-4°F to 130°F)
- Recommended Storage (storage area should be clean, cool, dry and ventilated) 5°C to 30°C
(41°F to 86°F)

TYPICAL PERFORMANCE


Constant Current

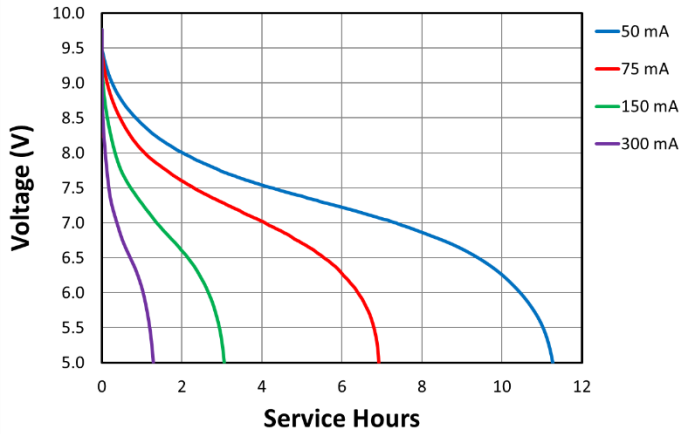


Constant Current

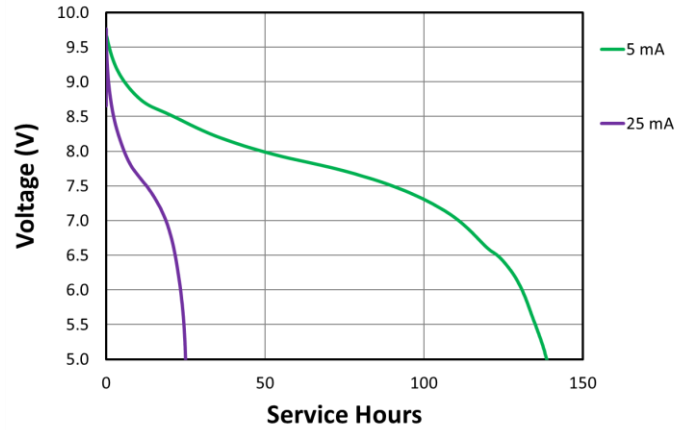

Constant Resistance

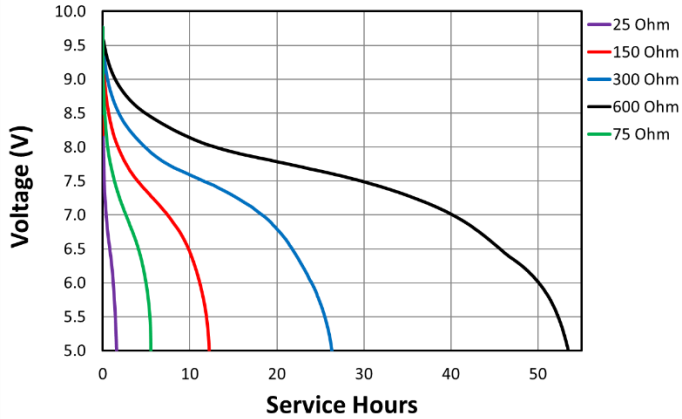

Constant Power

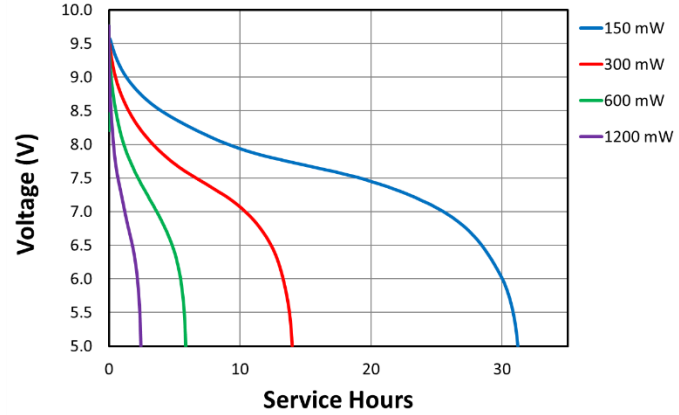

Constant Current - 75mA

