



## CBHD3

Main features:

Reduced weight and dimensions

Power from 180W up to 600W

Current from 15A to 25A

Available in plastic and metal case  
(ON-BOARD use only)


Din forhandler



**GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961**

APPLICATIONS



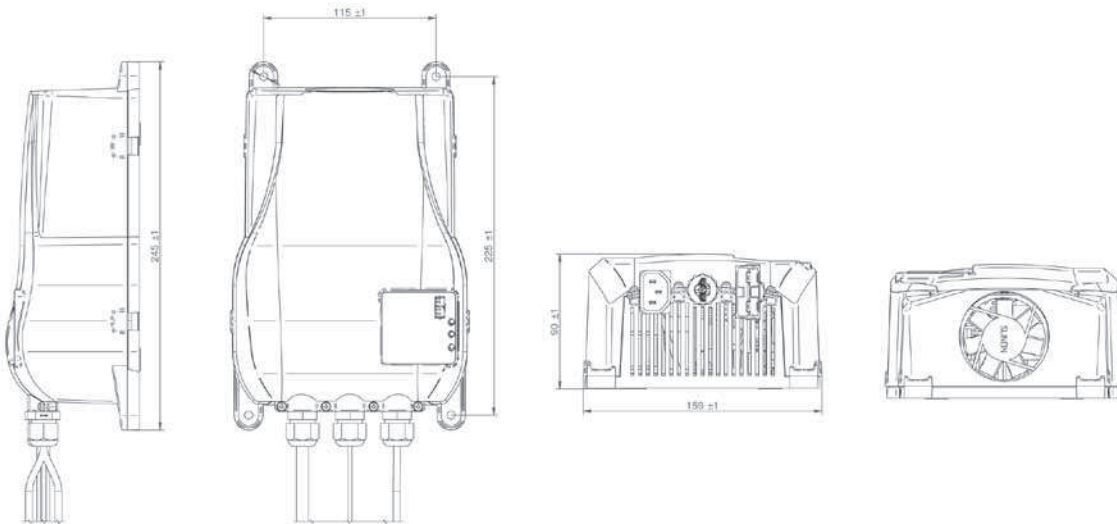

DIMENSIONS (LxWxH): 160x245x90 mm – 6.30x9.65x3.54 in  
 WEIGHT: 1,90 Kg - 4.19 lbs  
 PROTECTION GRADE IP30  
 INPUT VOLTAGE: Universal 100 ÷ 240 Vac – 50-60 Hz

Battery Voltage	Battery Range		Charging Current	Model
	5h	20h		
12V	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	12-15
	120 ÷ 195 Ah	150 ÷ 240 Ah	20A	12-20
	180 ÷ 260 Ah	220 ÷ 315 Ah	25A	12-25
24V	100 ÷ 150 Ah	130 ÷ 180 Ah	15A	24-15
	120 ÷ 195 Ah	150 ÷ 240 Ah	20A	24-20
	180 ÷ 260 Ah	220 ÷ 315 Ah	25A	24-25

Din forhandler



**GACELL A/S - Sletten 17 - DK 7500 Holstebro - 961 02 961**

