

Your supplier



The right battery

GACELL A/S · Sletten 17 · 7500 Holstebro · DK
+45 961 02 961 · www.gacell-power.dk

BATTERY CHARGER TECHNICAL MANUAL

MODEL: UY240-HM2406-1

VERSION: V1.0

Contents

1.	Revised History	1
2.	Warning	1
3.	Notes.....	1
4.	Product Number System.....	2
5.	Product Weight And Appearance	2
6.	Indicator LEDs.....	3
7.	Electronic Characteristics	3
	Charge Curve	3
8.	Protect Characteristics	4
8.1	Output Over Voltage Protection.....	4
8.2	Output Over Current Protection	4
8.3	Short Circuit Protection	4
8.4	Reverse Polarity Protection	4
8.5	Over-Temperature protection.....	4
9.	Environmental.....	4
9.1	Working Conditions.....	4
9.2	Storage Conditions	4
10.	Reliability.....	5
11.	Safety	5
11.1	Insulation Characteristics	5
11.2	Leakage Current	5
11.3	Standard specifies	5
11.4	Electromagnetic Interference.....	5
11.5	Electromagnetic Immunity	5

1. Revised History

Table 1. Revised History

Version	Detail	Date
V1.0	The initial version	2/12/2014

2. Warning

Please use the charger in accordance with the parameters and connections in the manual, and do not disassemble it. Or we will not be liable for the resulting loss.

3. Notes

(1) High voltage inside the case, may cause harm to the human body. If the charger fails, please contact us. Users and non-professional maintenance staff is forbidden to open the charger.

(2) Charger should not be used where in damp, water, direct sunlight or near heat sources.


(3) Charger should be used where clean and well ventilated. Don't sheltered inlet or outlet during charging, and make sure that both inlet and outlet have air space of at least 10cm.

(4) Charger should be used to prevent children closer and touch.

(5) Is prohibited that the charger used or stored near flammable, explosive goods.

(6) While cleaning the charger please do not wash with water, we recommend using a clean rag dipped a small amount of alcohol.

4. Product Number System

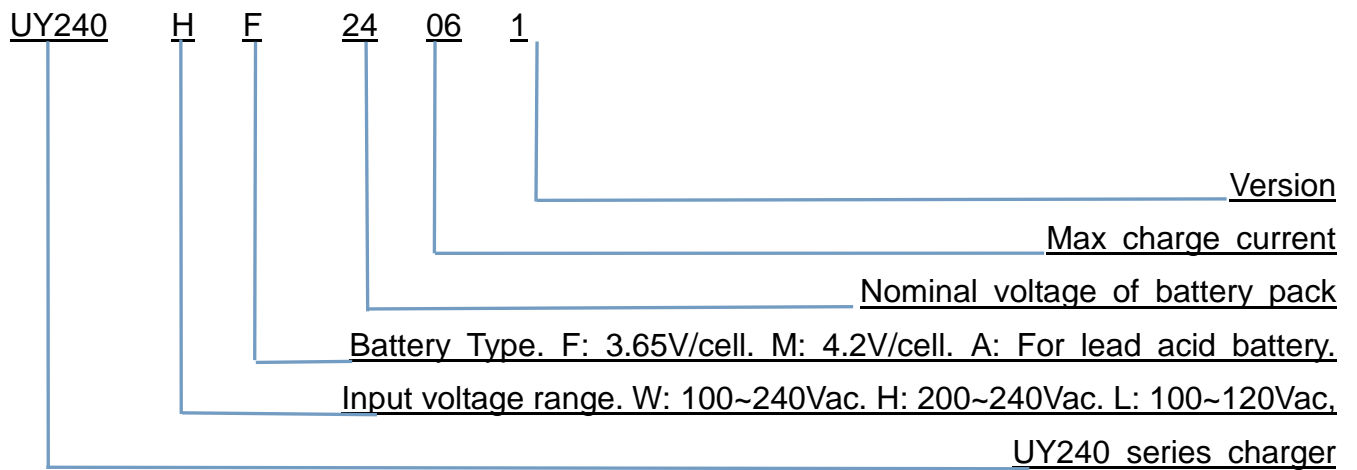

5. Product Weight And Appearance

UY240 series charger is about 1.2kg. Charger appearance as figure 1 below.

YEWY



Size: 170mm×90mm×50mm

Figure 1. Appearance

6. Indicator LEDs

RED & GREEN: STANDBY or CHARGED


RED & RED: CHARGING

7. Electronic Characteristics

Table 3. Electronic characteristics

No.	Item	Unit	Min.	Typ.	Max.	Remark
01	Input voltage	Vac	200	220	260	
02	Input power	W	-	-	230.2	
03	Constant charge voltage	Vdc	29.1	29.4	29.7	
04	Float voltage(for lead acid battery only)	Vdc	-	-	-	
05	Constant charge current	A	5.8	6.0	6.2	
06	Charge complete current	mA	330	480	630	
07	Ripple voltage	-	-	-	Constant charge voltage*1%	
08	Efficiency	%	80	-	-	Full load

Charge Curve

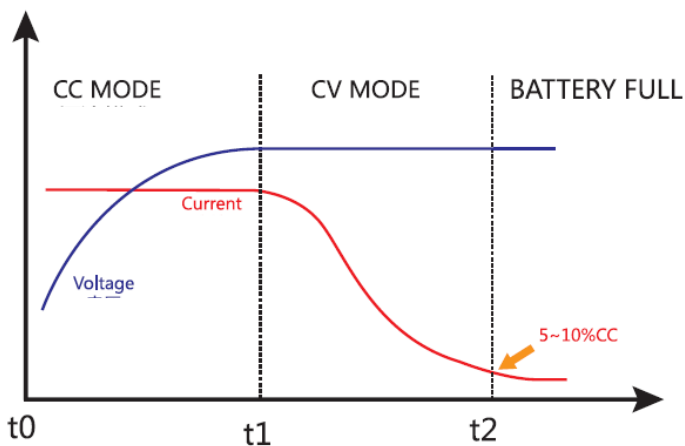

8. Protect Characteristics

8.1 Output Over Voltage Protection

When the charger output voltage exceeds the maximum charging voltage, the charger enters the standby state protection. It will restore to normal working condition automatically after troubleshooting.

8.2 Output Over Current Protection

When the charger output current exceeds the maximum charging current, the charger enters the over current protection status. It will restore to normal working condition automatically after troubleshooting.

8.3 Short Circuit Protection

When the charger has short circuit at output, the charger enters short-circuit protection status. It will restore to normal working condition automatically after troubleshooting.

8.4 Reverse Polarity Protection

If charger DC output terminal connect to battery reverse, fuse on the output side would be blown, output circuit would be cut off. Replace the fuse, and then connect to battery correctly, charger would resume working.

8.5 Over-Temperature protection

When charger internal temperature exceed 85°C - 95°C , it will be Into the over-temperature protection state and the cuts off output and the cooling fan stop working. When the temperature returns to 55°C - 65°C , the charge is restored again.

9. Environmental

9.1 Working Conditions

Ambient temperature: $-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$;

RH: 5% \sim 95%;

Max. altitude: 2000 meter;

Cooling: UY series chargers use of forced air cooling system. Under dustless and ventilated conditions, the full load temperature rise not exceeding 40°C .

9.2 Storage Conditions

Ambient temperature: $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$;

RH: 0% \sim 95%;

Max. altitude: 20000 meter

10. Reliability

Table 4. Reliability

No.	Item	Description	Remark
01	MTBF	average operating life ≥ 30000 h	25°C
02	Anti-vibration	5mm/50Hz/600s vibration test	PASS

11. Safety

11.1 Insulation Characteristics

Table 5. Insulation characteristics

Insulation resistant	Input to output	DC500V 50M Ω min (25°C, Humidity \leq 70%)
	Input to case	DC500V 50M Ω min (25°C, Humidity \leq 70%)
	Output to case	DC500V 50M Ω min (25°C, Humidity \leq 70%)
Hi-Pot	Input to output	1500Vac 50Hz 1minute \leq 10mA
	Input to case	1500Vac 50Hz 1minute \leq 10mA
	Output to case	500Vac 50Hz 1minute \leq 10mA

11.2 Leakage Current

With max input and full load, the leakage current < 0.75 m A, meet to Class II.

11.3 Standard specifies

EN 55022:2006+A1:2007

EN 61000-3-2:2006+A1:2009+A2::2009

EN 61000-3-3:2008

EN 55024:1998+A1:2001+A2:2003

11.4 Electromagnetic Interference

Conducted interference: EN55011.13.14-1.15.22.FCC part 15& 18.VCCI;

Radiated interference: EN55011.13.22.FCCpart 15& 18.VCCI/EN55013.EN55014-1.

11.5 Electromagnetic Immunity

Anti-static: IEC/EN61000-4-2 8KV;

Pulse group: IEC/EN61000-4-4 2KV;

Lightning surge: IEC/EN61000-4-5 1.5KV;

Harmonic: IEC/EN61000-3-2 $< 25\%$.