

A278B3X0_1 65 Ah

According to EN 50342



**EFB
Start Stop**

SEALED MAINTENANCE FREE



Electrical specification

Voltage:	12V
Capacity C²⁰:	65 Ah
Cold cranking current:	680 A [EN]
Cold cranking current:	400 A [DIN]

Mechanical specification

Dimensional group:	LB3
ETN reference:	565 002 068
DIN reference:	56502
Dimensions^A in mm (LxWxH)	278x175x175
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B14
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Grey

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Grey

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Grey


Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level	Micro-cycle performance
W4	C2	V2	E2	M1


Weight^B

Battery weight in kg:	12.10
Acid weight in kg:	5.30
Total battery weight in kg:	17.40

Layout

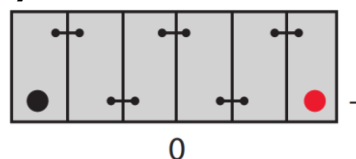

Hold-down

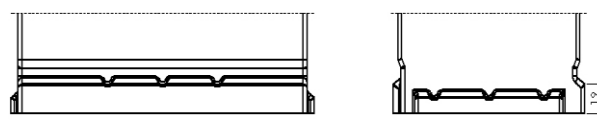

Separator

Type	PE
-------------	-----------

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.