

MONBAT EFB Start-Stop Asia G188J0X0_1 85 Ah

According to EN 50342



**EFB
Start Stop**

SEALED MAINTENANCE FREE



Electrical specification

| | |
|---------------------------------|--------------------|
| Voltage: | 12V |
| Capacity C²⁰: | 85 Ah |
| Cold cranking current: | 740 A [EN] |
| Cold cranking current: | 510 A [DIN] |

Mechanical specification

| | |
|--|--------------------|
| Dimensional group: | D31 |
| ETN reference: | 585 002 074 |
| DIN reference: | 58502 |
| Dimensions^A in mm (LxWxH): | 304x173x220 |
| Cell Layout: | 0 |
| Terminal Type: | 1 |

Container

| | | |
|-------------|-------------------------|----------------------|
| Case | Material | Polypropylene |
| | Bottom hold-down | B1 |
| | Colour | Black |

| | | |
|------------|---------------------|----------------------|
| Lid | Material | Polypropylene |
| | Cover design | SMF |
| | Colour | GREY |

| | | |
|------------------|-----------------|----------------------|
| Vent caps | Material | Polypropylene |
| | Type | SMF |
| | Colour | Black |

| | | |
|----------------|-----------------|----------------------|
| Handles | Material | Polypropylene |
| | Position | Top - on lid |
| | Colour | GREY |


Battery classification as per EN 50342-6

| Water consumption | Charge retention | Vibration resistance | Endurance Level | Micro-cycle performance |
|--------------------------|-------------------------|-----------------------------|------------------------|--------------------------------|
| W4 | C2 | V2 | E2 | M1 |


Weight^B

| | |
|------------------------------------|--------------|
| Battery weight in kg: | 15.30 |
| Acid weight in kg: | 7.00 |
| Total battery weight in kg: | 22.30 |

Layout

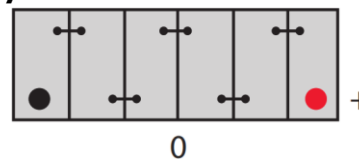

Hold-down



Separator

| | |
|-------------|-----------|
| Type | PE |
|-------------|-----------|

A. Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
B. Weight may vary ±5%.